


Pier & Piling Anodes

Pier & Piling Anodes are used on seawalls, piers, pilings and other structures for cathodic protection. Purity Casting Alloys anodes are available in either Aluminum (MIL-A-24779) or Zinc (MIL-A-180011K) with a variety of cores such as Flat Bar Steel, Steel Pipe, Threaded Rod, "Eye Bolt" or Galvanized Cable. All of our Pier & Piling Anodes are custom made to order. Purity Casting Alloys meets or exceeds industry standards and can manufacture any standard or custom anode type you may require. Lengths can be adjusted to any size within the constraints of our molds.

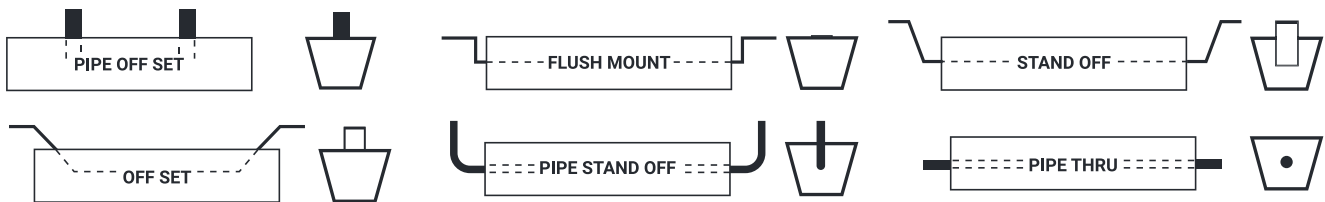

Standard Dimensions and Weights

| Anode Type | Nominal Dimensions - In. (mm) | | | Weight (lbs) | Core Availability (by type) |
|------------|-------------------------------|----------|----------|--------------|-----------------------------|
| | L | W | H | | |
| PCA4x4 | 60 (1525) max | 4 (102) | 4 (102) | 32- 96 | Flat bar, Pipe, Rod, Cable |
| PCA6x6 | 72 (1829) max | 6 (152) | 6 (152) | 85 - 260 | Flat bar, Pipe, Rod, Cable |
| PCA8x8 | 72 (1829) max | 8 (203) | 8 (203) | 125 - 460 | Flat bar, Pipe, Rod, Cable |
| PCA10x10 | 60 (1525) max | 10 (254) | 10 (254) | 240 - 500 | Flat bar, Pipe, Rod, Cable |

Available in other dimensions upon request. Lengths can be adjusted to any size within the constraints of our molds.